TD9080 "9ET/9360

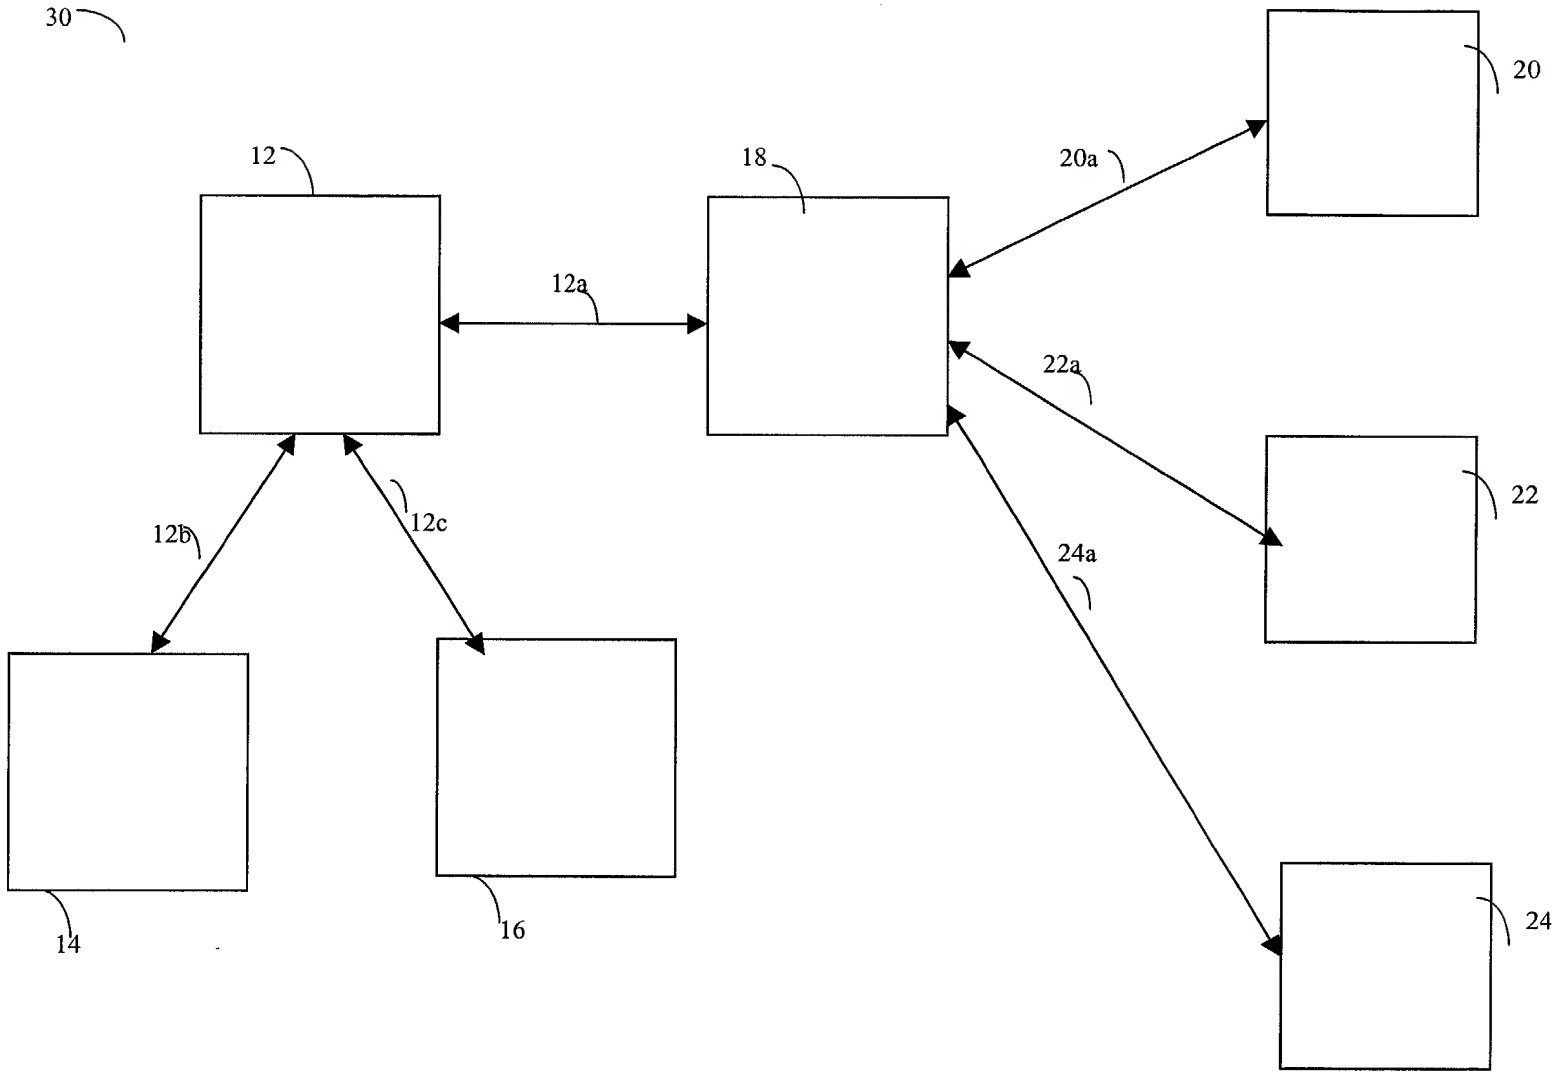

FIGURE 1

EP 0 990 980 A2

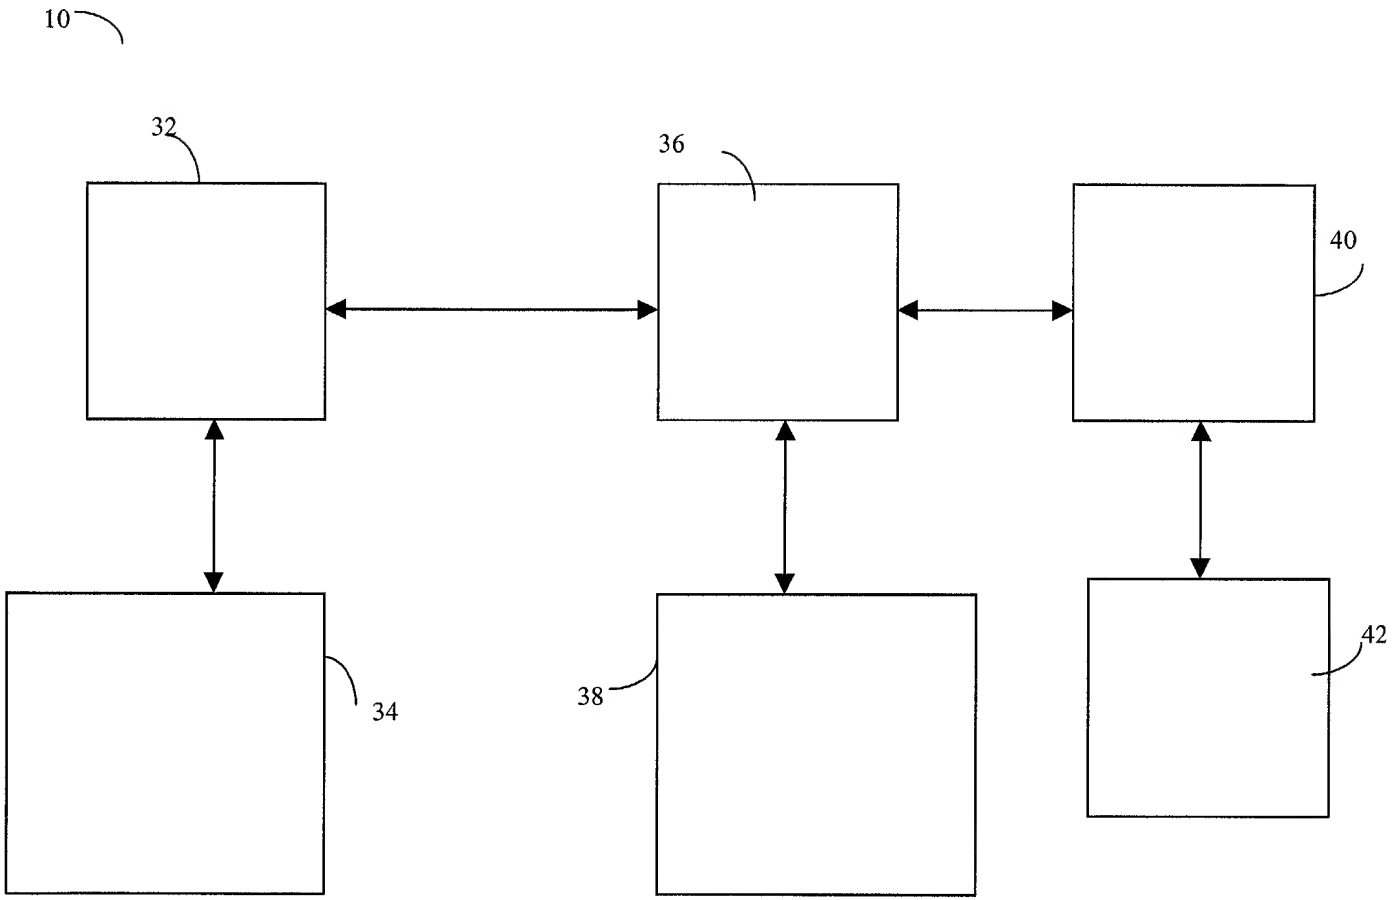

FIGURE 2

TO9080 "9ET/9860

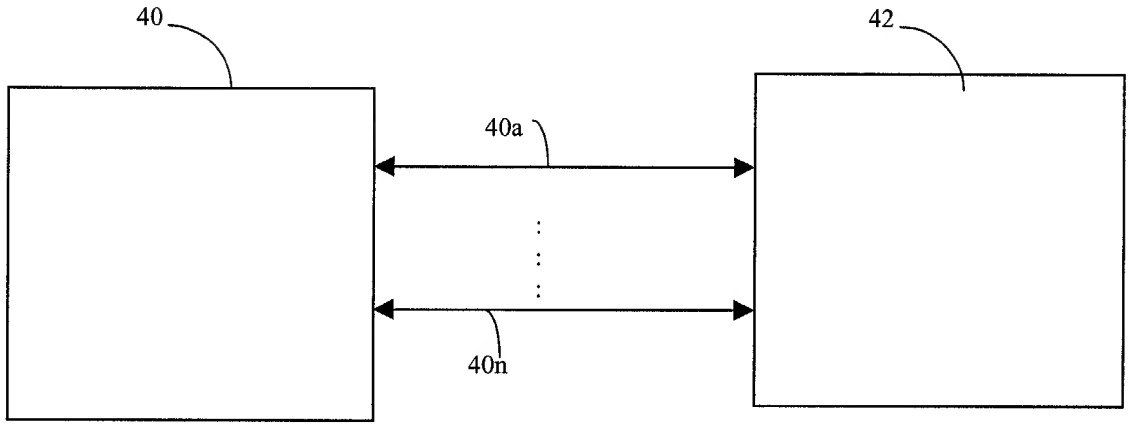

FIGURE 3

T09080" 9E7/9860

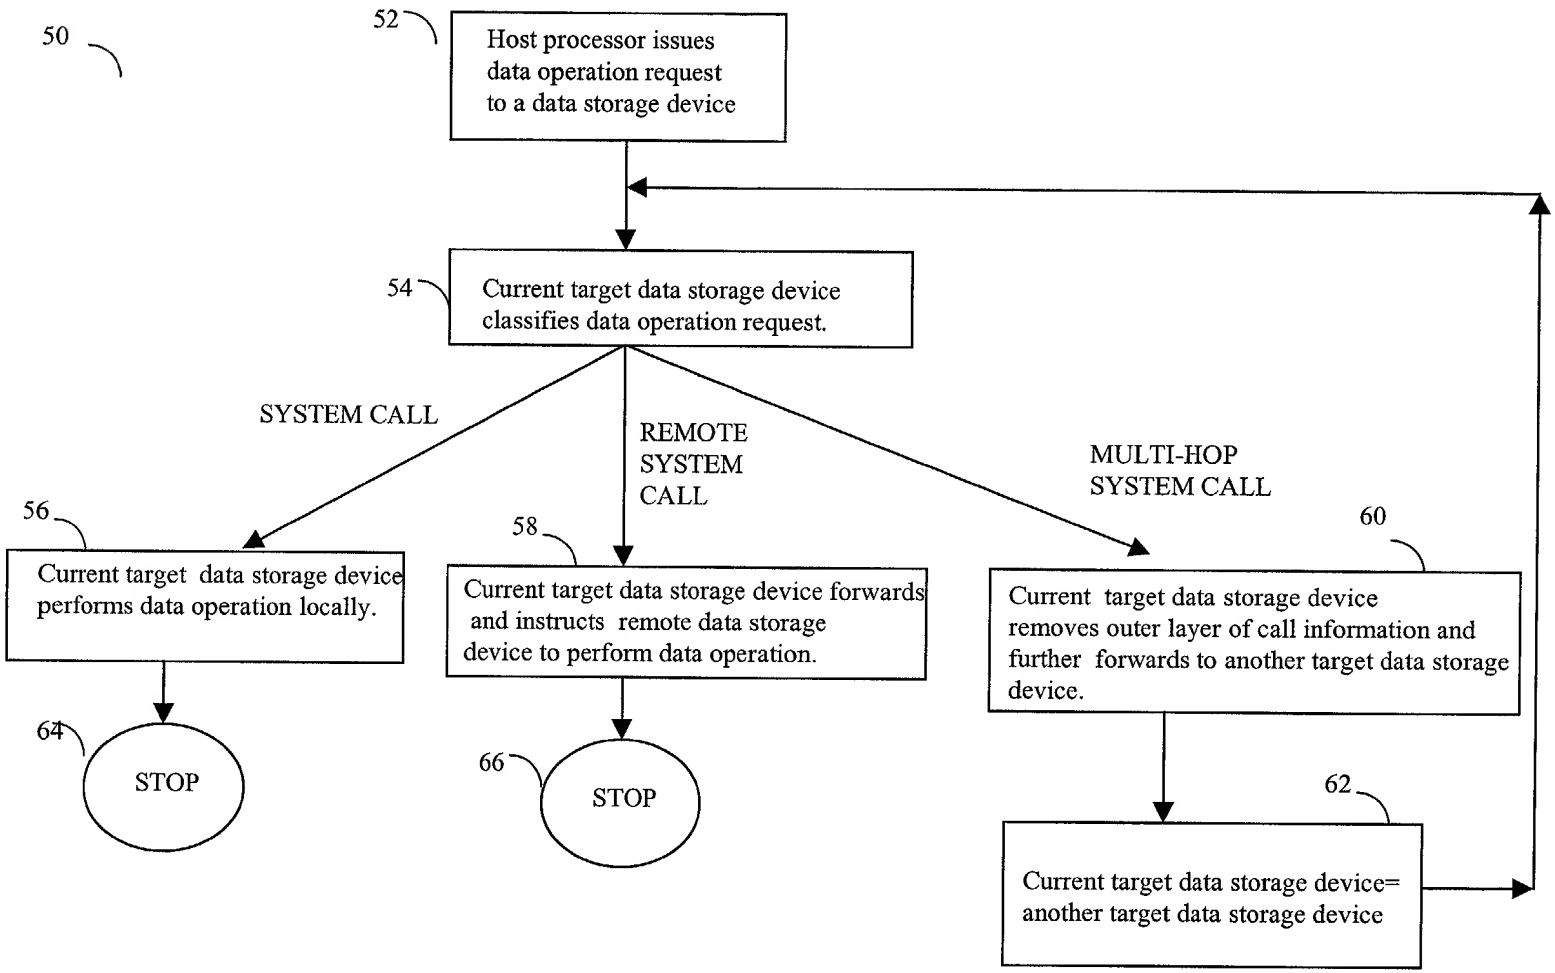

FIGURE 4

TO9080 "9ET/9860

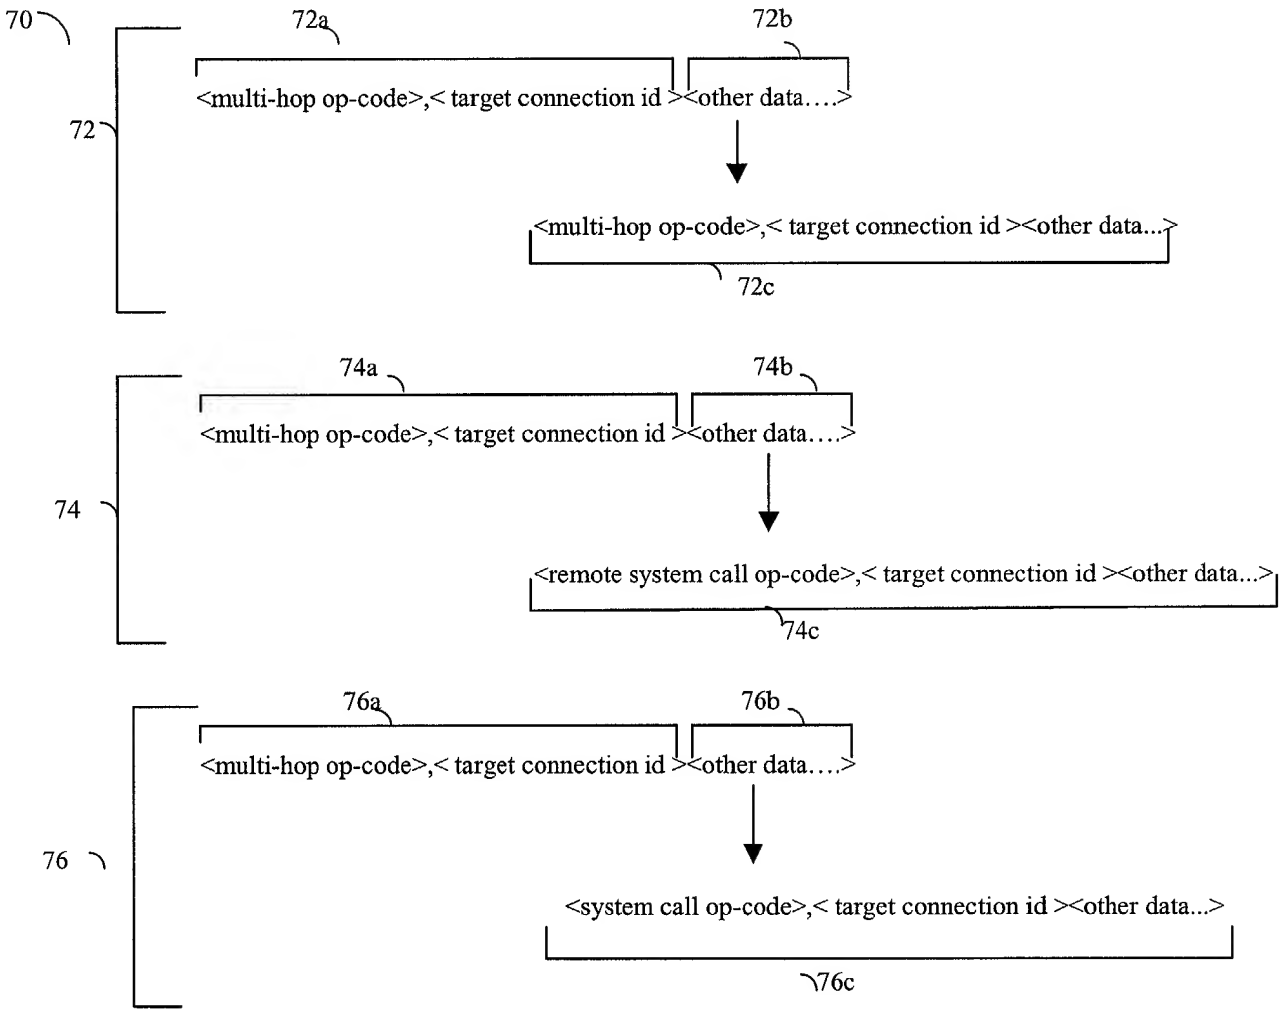

FIGURE 5

TO9080 "9ET/9860

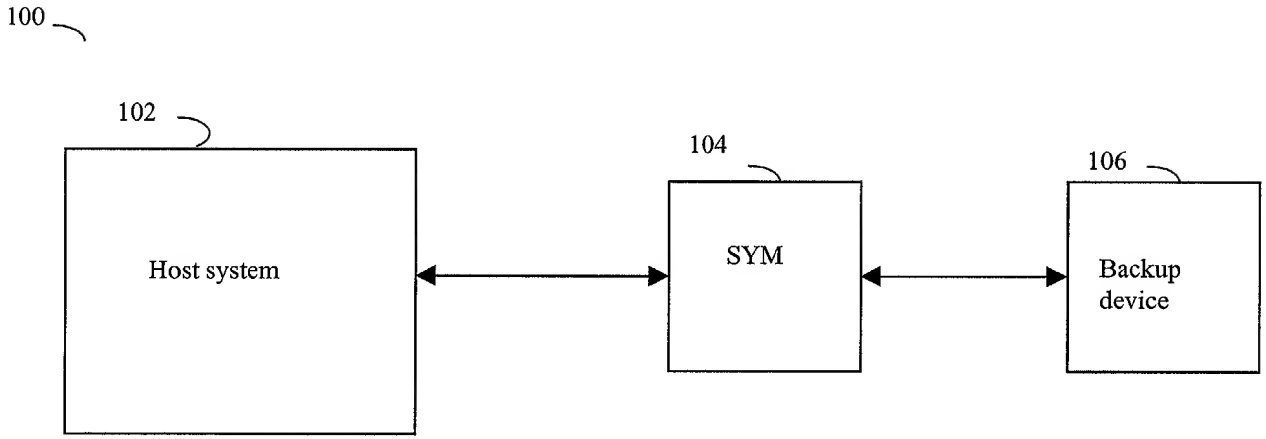

PRIOR ART

FIGURE 6

TO9080" 9ET/9860

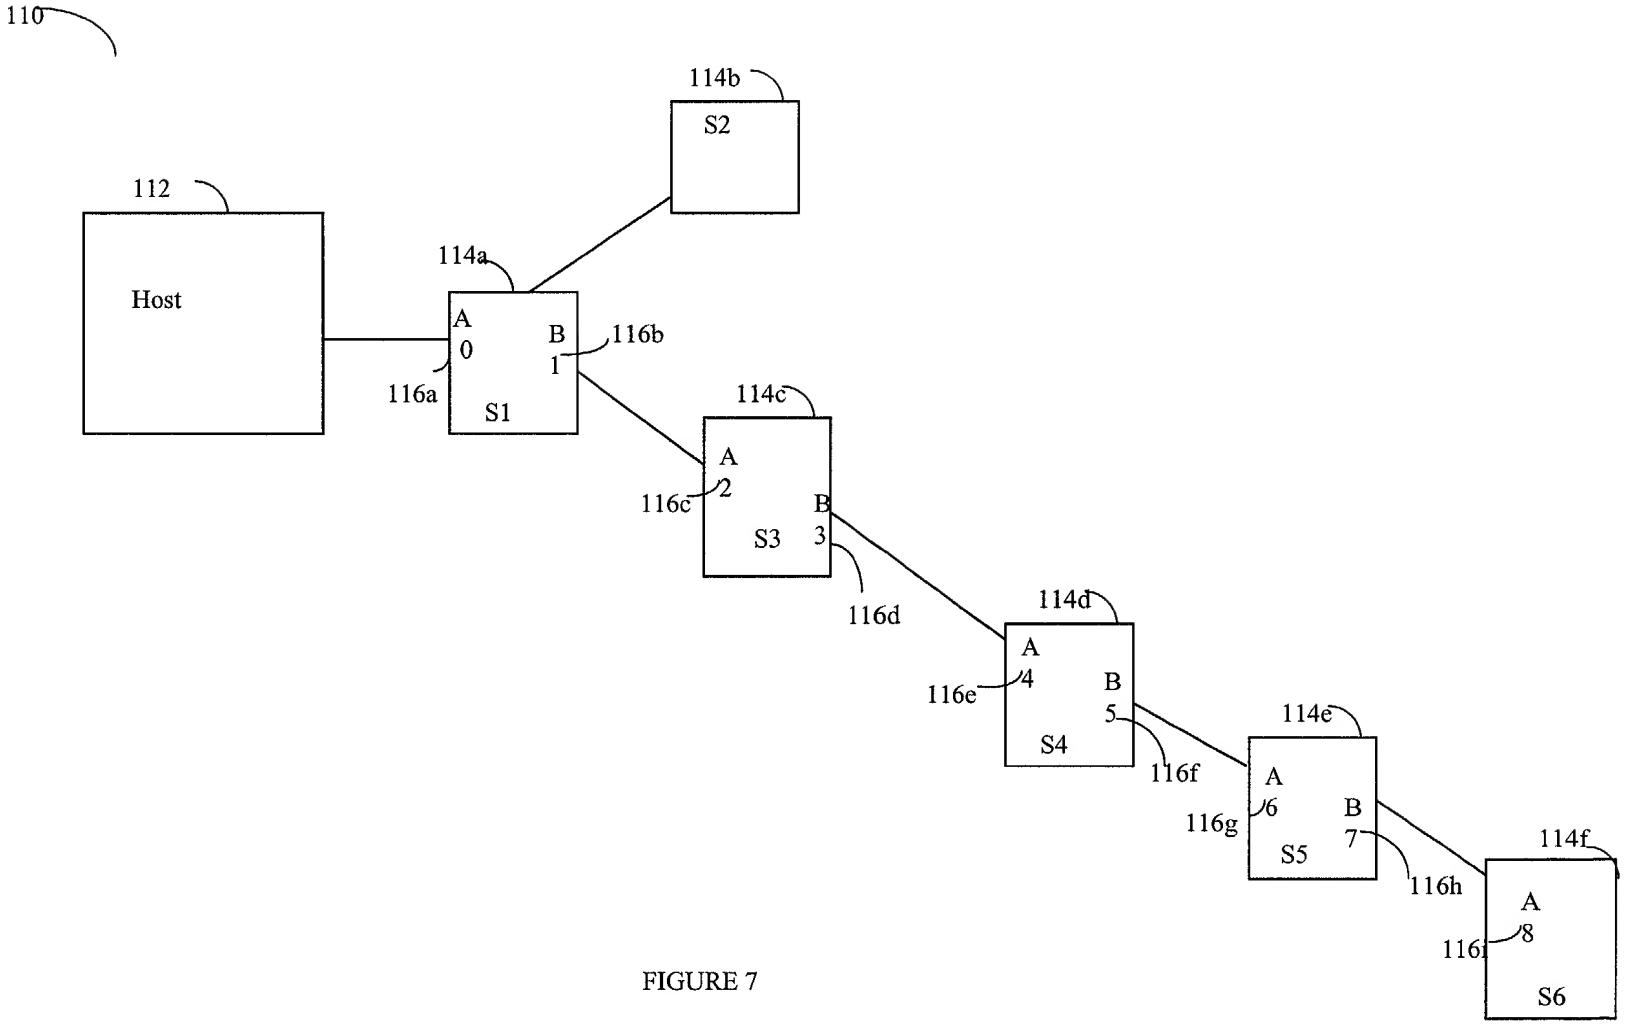

FIGURE 7

T09080" 9E7/9860

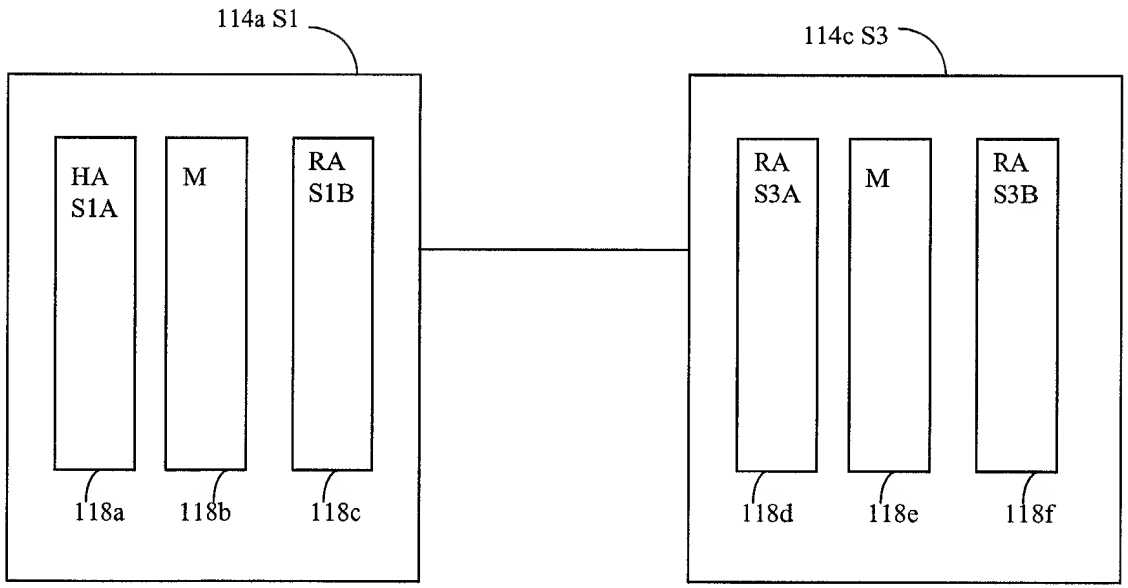

FIGURE 8

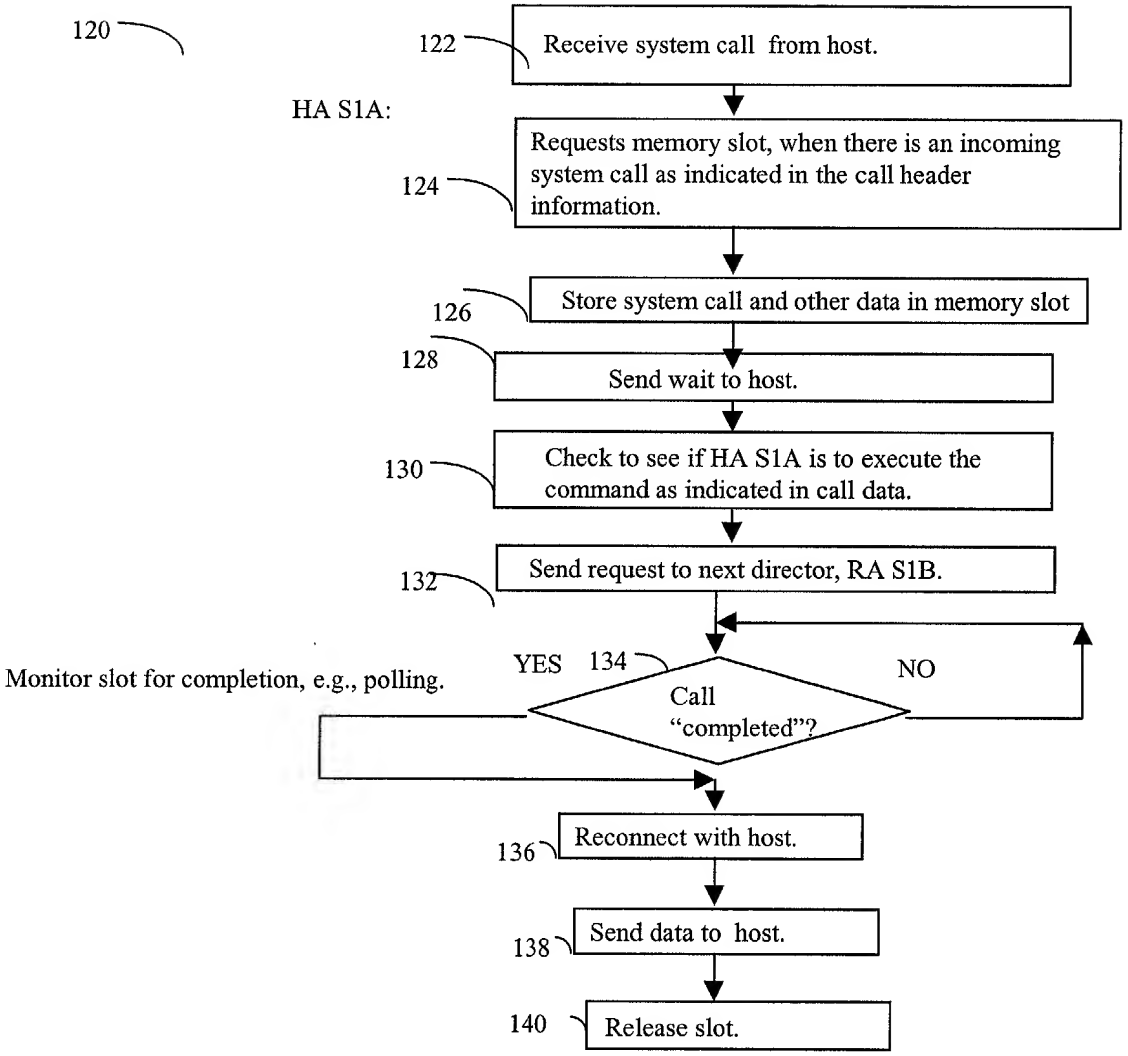
120
122
Receive system call from host.
HA S1A:
Requests memory slot, when there is an incoming system call as indicated in the call header information.
124
Store system call and other data in memory slot
126
128
Send wait to host.
130
Check to see if HA S1A is to execute the command as indicated in call data.
Send request to next director, RA S1B.
132
Monitor slot for completion, e.g., polling.
YES
134
NO
Call "completed"?
Reconnect with host.
136
Send data to host.
138
Release slot.
140

FIGURE 9

TO9080 "9ET29860

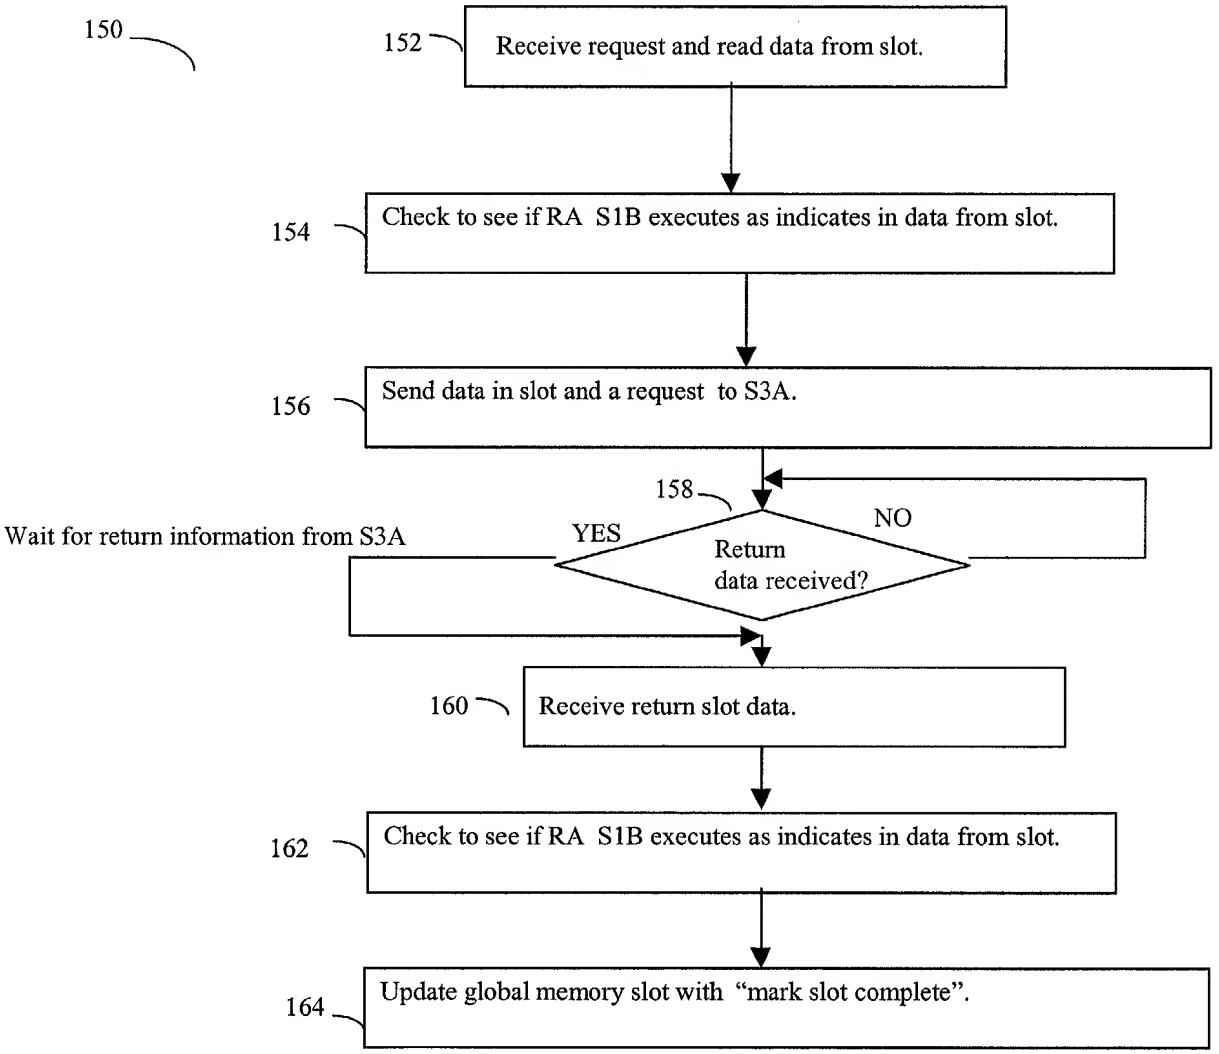

FIGURE 10

EP 2 909 980 B1 2019-09-18

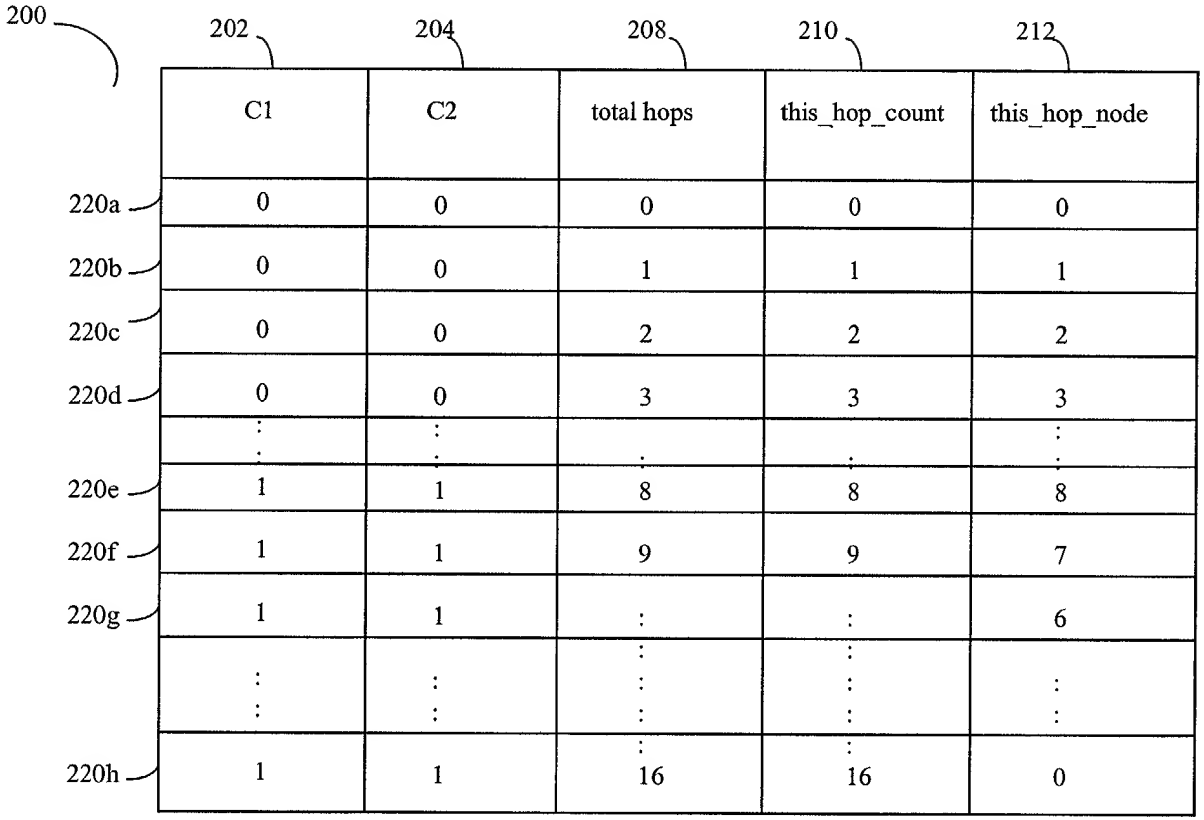

FIGURE 11